


DLX-CONV

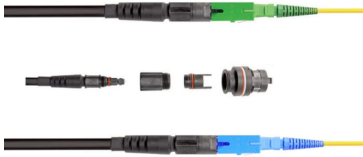

DLX Fiber Optic hardened Converters

Featuring an innovative universal design, DLX fiber optic connectors and adapters are easy and fast to deploy while offering the performance you've come to expect from CommScope. With DLX, installers don't need a patchwork of cable assemblies and components. The DLX connector is compatible in applications that require different styles of hardened fiber connectors— simplifying ordering and improving compatibility between network elements.

- Compact and small footprint, space-saving design for highdensity environments
- Compatible with multiple hardened connectors
- Converter kits arepreassembled for ease of installation

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber converter
Product Brand	DLX®
Product Series	FHD

Environmental Specifications

Operating Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Qualification Standards	Telcordia GR-326-CORE

Packaging and Weights

Packaging quantity	25
---------------------------	----